

DC INPUT / DC OUTPUT DISPLACEMENT TRANSDUCERS S-D AND M-D SERIES

The Instruments & Control S-D and M-D series are displacement transducers of LVDT type with self-contained signal conditioners. Their output is a DC voltage proportional to the displacement of the core from its zero position, while the polarity indicates the direction of the displacement.

Some of their features:

- High linearity and stability.
- Negligible sensitivity to supply voltage fluctuation.
- Low output impedance to minimize loading effects.
- Protection against supply polarity reversing.
- Low power consumption, 200 mW typical.
- Infinite resolution: dynamic ranges of better than 100,000:1 are practical.
- All-metal design, including the coil form, for ruggedness and dimensional stability.



SPECIFICATIONS	S-D Series	M-D Series			
Linearity	0.25%FR typ ¹⁾	0.15%FR typ.			
Input	±15V nominal, 13.5 to 16.5V range, 8 mA typ.				
Output	±5 VDC F.S.				
Output impedance	Less than 10 Ω				
Minimum load resistance	100 Ω				
T. C. of zero	0.01% F.R./°C typ. (0° to 70°C)				
T. C. of scale factor	0.03% /°C typ. (0° to 70°C)				
Operating temperature range	-25°C to 85°C				
Survival temperature range	-55°C to 95°C				
Frequency response	0 to 100 Hz, ±3 db				
Ripple	Less than 0.25% F.S., 5KHz typ.				
Shock survival	250g, 11ms				
Vibration	20g, up to 2 KHz				
Housing material	400 series Stainless Steel	300 series Stainless Steel			
Lead wires	#28 AWG plated, stranded copper, Teflon insulated, 12" long (300 mm)				

¹⁾ For model S10, the linearity is 0.5%F.R.

Rev. B © Singer Instruments & Control Ltd., 2012

WWW.SINGER-INSTRUMENTS.COM


Information furnished by Singer Instruments & Control is believed to be accurate and reliable. However, no responsibility is assumed by Singer Instruments & Control for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Singer Instruments & Control Ltd.


Singer Instruments & Control Ltd.

2 Yozma St., Tirat Carmel 39032, **ISRAEL** info@singer-instruments.com

Tel: 972-4-857-8880 Fax: 972-4-857-8881



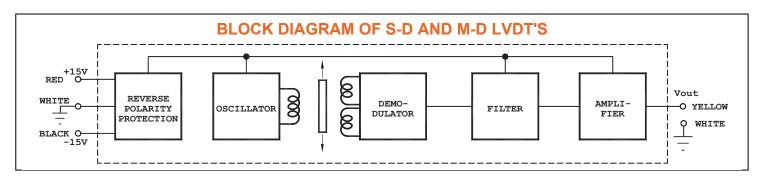



NOTE: Output will be positive when core moves from zero toward lead wires end of LVDT

	S-D S	Series	M-D Series			
	inches	mm	inches	mm		
D	0.750(+0.008, -0.004)	19(+0.20, -0.10)	0.750±0.005	19±0.13		
W	0.303+0.008 7.7+0.2		0.148±0.004	3.75±0.10		
X	0.235±0.005	6.0±0.10	0.110±0.005	2.8±0.10		
Υ	#4-40 UNF-2B	M3x0.5-6H	#1-72 UNF-2B	M2x0.4-6H		
С	0.4min	10 min	0.3min	7.5min		

S - D Series:

o – b defies.									
	LINEAR RANGE		DIMENSIONS					CORE	
MODEL			Α		В		Р		WEIGHT
	inches	mm	inches	mm	inches	mm	inches	mm	Grams
S.1 D	±0.100	±2.5	2.40	61	0.80	20	0.60	15	4
S.2 D	±0.200	±5.0	3.60	91	1.71	43	1.20	30.5	8
S.5 D	±0.500	±12.5	5.50	140	3.0	76	2.15	55	14
S1 D	±1.000	±25.0	6.70	170	3.3	84	2.75	70	16
S2 D	±2.000	±50.0	12.00	305	6.45	164	5.40	137	30
S5 D	±5.000	±125.0	23.70	602	11.60	295	11.25	286	55
S10 D	±10.000	±250.0	37.20	945	22.0	559	18.00	457	104

M - D Series:

M.02 D	±0.020	±0.5	0.95	24.1	0.375	9.5	A/2	0.3
M.05 D	±0.050	±1.25	0.95	24.1	0.575	14.6	A/2	0.5
M.1 D	±0.100	±2.5	1.20	30.5	0.720	18.3	A/2	0.7
M.2 D	±0.200	±5.0	2.10	53.3	1.425	36.2	A/2	1.3
M.5 D	±0.500	±12.5	3.50	88.9	1.830	46.5	A/2	1.7
M1 D	±1.000	±25.0	5.00	127	2.700	68.6	A/2	2.5

All specifications subject to change without notice.

Rev. B © Singer Instruments & Control Ltd., 2012

WWW.SINGER-INSTRUMENTS.COM

Tel: 972-4-857-8880

Fax: 972-4-857-8881

Information furnished by Singer Instruments & Control is believed to be accurate and reliable. However, no responsibility is assumed by Singer Instruments & Control for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Singer Instruments & Control Ltd.

Singer Instruments & Control Ltd.

2 Yozma St., Tirat Carmel 39032, **ISRAEL** info@singer-instruments.com