

# Radiation Resistant Servo-Inclinometer model TS2R

This Servo-Inclinometer was designed to operate in intense radiation environment. It was originally developed in cooperation with Ontario-Hydro of Canada to monitor the fuelling machines of nuclear power-stations, where it is exposed to radiation over extended periods of time.

## ● FEATURES

- High radiation resistance
- High accuracy closed-loop operation
- Good repeatability
- Fast response
- Low power consumption
- High level, low impedance output




## ● SPECIFICATIONS:

Measuring range	±2 degrees to ±15 degrees max
Non-linearity error	0.02%FR typ (1)
Resolution	<0.01%FR
Non-repeatability & hysteresis	<0.001 deg
Sensitive axis misalignment	< 0.75 deg
Cross-axis sensitivity	<0.002g/g
Bias	<0.1 deg
Power supply	±15VDC @ 10 mA
Output	±5V max
Output impedance	<10 Ω
Step response	50 msec
Zero temperature coefficient	0.002 deg/°C typ (10 to 40°C)
Span temperature coefficient	0.02%/°C typ
Operating temperature range	0 to +70°C
Rated performance temperature range	10 to +40°C
Maximum overload	100g constant acceleration
Shock survival	250g, 11msec
Housing material	Sulphuric anodized # 2024 Aluminum alloy
Weight	100 grams

Notes: 1) Non-linearity error defined as maximum deviation of any point from the theoretical sine function line in percents of the full measuring range.

## ● DIMENSIONS (INCH/[mm]):

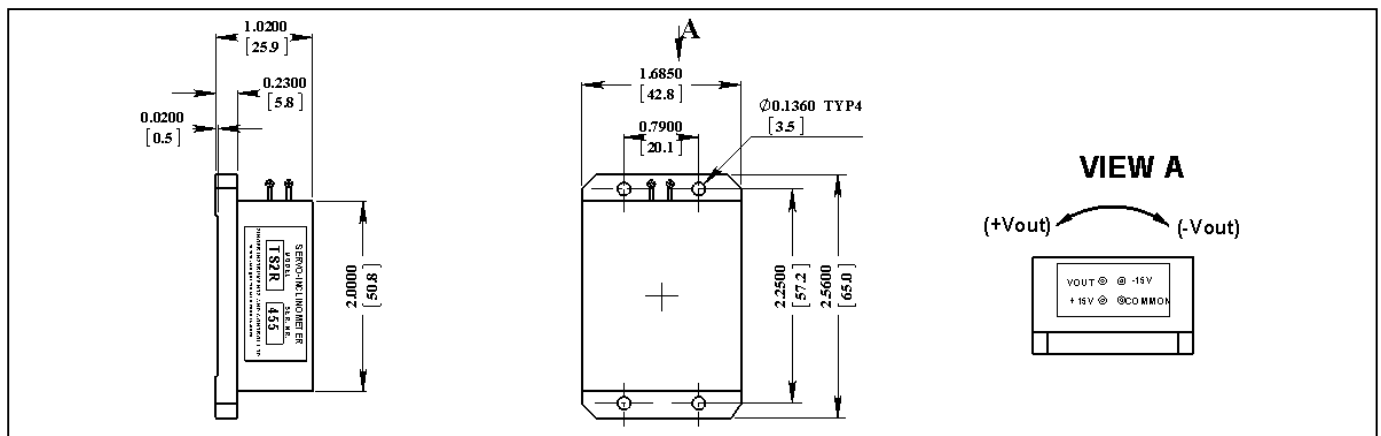

Rev. E

© Singer Instruments & Control Ltd., 2013

WWW.SINGER-INSTRUMENTS.COM

Information furnished by Singer Instruments & Control is believed to be accurate and reliable. However, no responsibility is assumed by Singer Instruments & Control for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Singer Instruments & Control Ltd.

## Singer Instruments & Control Ltd.

2 Yozma St., Tirat Carmel 39032, ISRAEL  
info@singer-instruments.com

Tel: 972-4-857-8880  
Fax: 972-4-857-8881